



REV	MARK	HISTORY	DATE	NAME
REV.0	—	—	2016.02.19	JSY




正视图

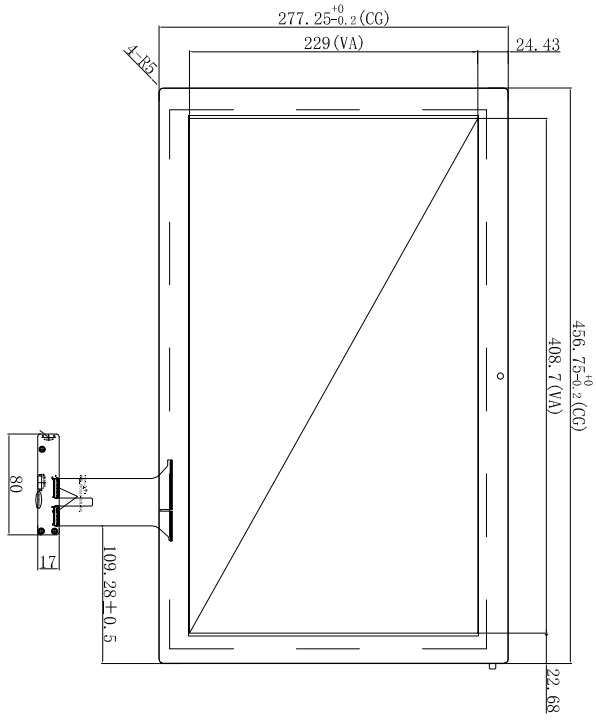

侧视图

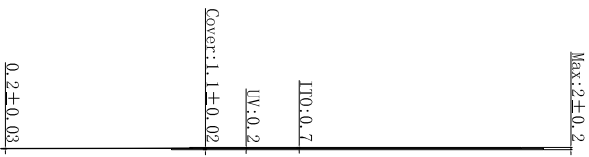

背视图

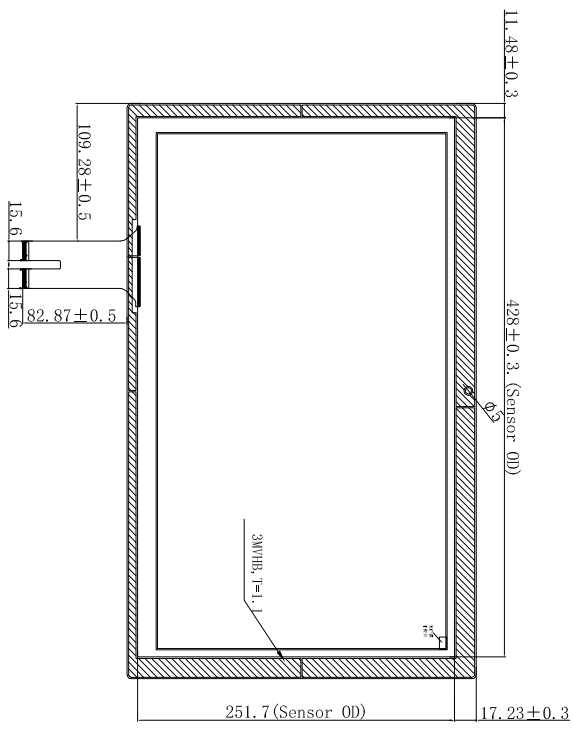

技术参数:

1. TP结构: G+G;
2. TP类型: COB; IC选用: ILITEK2302, 工作电压: 3.3V-5V
3. 透光率: ≥85%
4. 表面硬度: 6H以上
5. 工作环境: -10°C~+60°C, ≤85%RH
6. 储存环境: -10°C~+65°C, ≤85%RH
7. 未注尺寸公差按±0.2mm
8. 产品符合RoHS标准.

Touch Module Build Stack

TOP	Cover lens	1.1mm
	adhesive	0.2mm
	ITO	} 0.7mm
	Sensor glass	
BOTTOM	ITO	

IIC接口:

NO.	NAME
1	IO0IN
2	IO1IN
3	SCL
4	SDA
5	INT
6	ECU0

USB接口:

NO.	NAME
1	VDD/5V
2	D-
3	D+
4	GND

AC-C1115-18.5 工程图		SHEET 1 of 1		UNIT m m	SCALE 1 : 1	1st ANGLE PROJECTION
DESIGN	DATE	DATE	DATE			
JSY		2016.02.19				

深圳市安触科技有限公司
Shenzhen An-Touch Optics Tech.Co.,Ltd