





REV	MARK	HISTORY	DATE	NAME
REV. 0	—	—	2016. 06. 29	JSY
REV. 1	—	—	2016. 12. 15	JSY


正视图

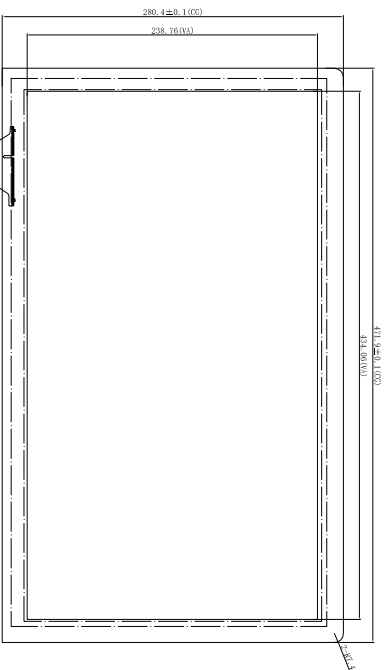

侧视图

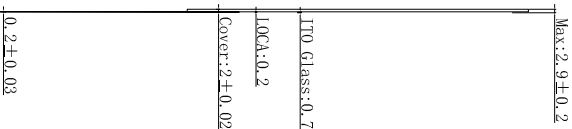

背视图

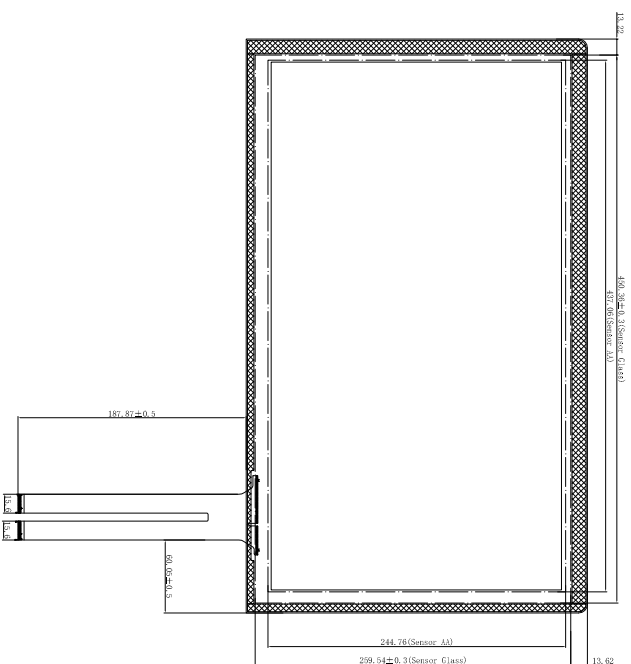

技术参数:

1. TP结构: G+G;
2. TP类型: COB; IC选用: ILITEK2302 (61*35)
工作电压: 3.3V-5V
3. 透光率: ≥85%
4. 表面硬度: 6H以上
5. 工作环境: -10℃~+60℃, ≤85%RH
6. 储存环境: -10℃~+65℃, ≤85%RH
7. 未注尺寸公差按±0.2mm
8. 产品符合RoHS标准.

Touch Module Build Stack

TOP	Bottom
Cover lens	2.0 mm
adhesive	0.2mm
ITO	} 0.7 mm
Sensor glass	
ITO	

NO.	NAME
1	VOID IN
2	INSP
3	SO.
4	SMA
5	INT
6	END

FIN	英文
1	VND/3V
2	D-
3	D+
4	GND

TTC接口: USB接口:

AC-C1118-19.5 工程图

DESIGN	DATE	DATE	SHEET	UNIT	SCALE	1st ANGLE PROJECTION
JSY	DATE	2016. 06. 29	1 of 1	m m	1 : 1	